
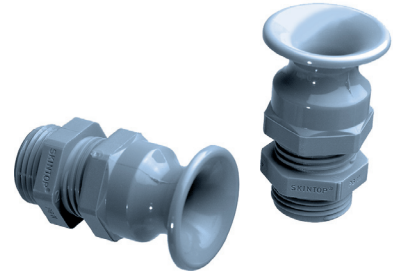


SKINTOP® BT-M



SKINTOP® BT-M

Benefits

- Reliable bending and antikink protection
- Conservation
- Functional reliability
- To protect flexible cables

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- Apparatus construction
- Light and sound applications
- Flexing machine parts

Approvals (Norm references)



Design

- Metric connection thread acc. to EN 50262

Note

- For suitable accessories see SKINTOP® accessories PG
- Counter nut to be used SKINTOP® GMP-GL-M

Technical data

Caution
 Installation dimensions and tightening torques see Appendix T21

Colour delivered
 RAL 7001 silver grey

Material
 Body: Polyamide
 Seal: CR

Degree of protection
 IP 68 - 5 bar

Range of temperature
 -20°C up to +100°C

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® BT-M						
53017420	16 x 1,5	3,5-8	19	45,0	12,0	100
53017430	20 x 1,5	5-12	24	54,0	13,0	50
53017440	25 x 1,5	9-14	27	57,0	13,0	50

ÖLFLEX®
 UNITRONIC®
 ETHERLINE®
 HITRONIC®
 EPIC®
 SKINTOP®
 SILVYN®
 FLEXIMARK®
 ACCESSORIES
 APPENDIX