


SKINDICHT® BL

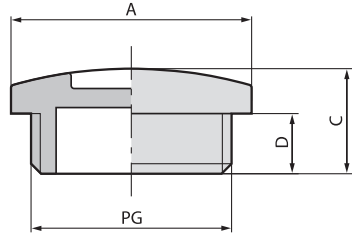

SKINDICHT® BL

Benefits

- Used wherever threads previously cut must be closed
- Assembling with screw driver

Application range

- Machine and apparatus construction
- Drives

Approvals (Norm references)



Design

- PG connection thread

Technical data

Material
 Blind plugs: Nickel plated brass
 O-ring: NBR

IP
 Degree of protection
 IP 54
 IP 68 with O-ring

Part number	Part designation / size	Pieces / PU
SKINDICHT® BL		
52002680	BL 7	100
52003390	BL 9	100
52003400	BL 11	100
52003410	BL 13,5	100
52003420	BL 16	100
52003430	BL 21	50
52003440	BL 29	50
52003450	BL 36	25
52003460	BL 42	10
52002790	BL 48	10
SKINDICHT® BL with O-ring		
54001610	BL 7 m. O-Ring	100
54000071	BL 9 m. O-Ring	100
54000040	BL 11 m. O-Ring	100
54001630	BL 13,5 m. O-Ring	100
54001640	BL 16 m. O-Ring	100
54001660	BL 21 m. O-Ring	50
54001620	BL 29 m. O-Ring	50
54001650	BL 36 m. O-Ring	25
54001670	BL 42 m. O-Ring	10
54001680	BL 48 m. O-Ring	10

ÖLFLEX®
 UNITRONIC®
 ETHERLINE®
 HITRONIC®
 EPIC®
 SKINTOP®
 SILVYN®
 FLEXIMARK®
 ACCESSORIES
 APPENDIX