




Coaxial - RG

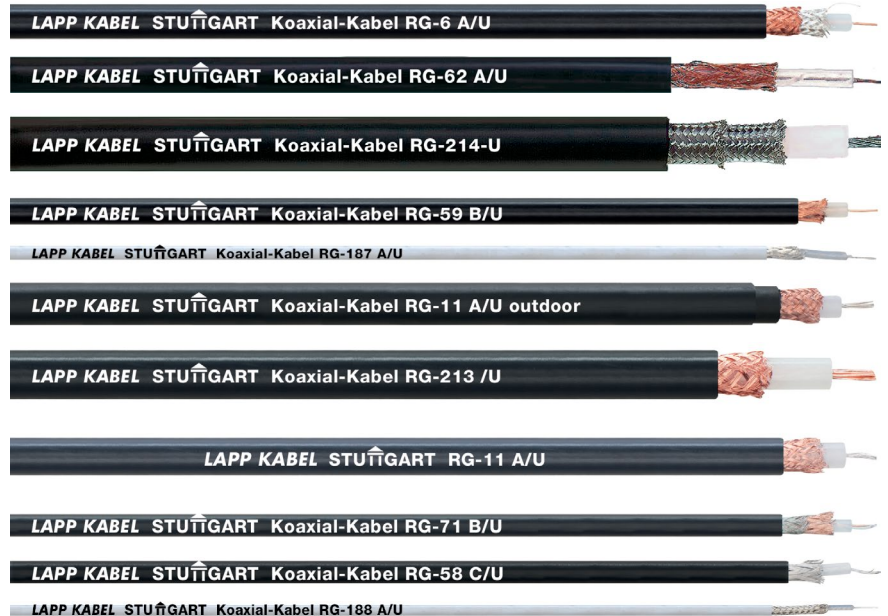

Benefits

- Coaxial cables allow distortion-free and low-attenuation transmission of signals with a high bandwidth.
- High frequencies

Application range

- For applications with limited movements and for fixed installation in dry or damp interiors and outdoors
- For radio and computer systems, as well as all applications related to commercial radio-frequency technology and electronics

Product features

- Flame-retardant according IEC 60332-1-2

Product Make-up

- Coaxial cables are significantly less sensitive to external interference due to their structure.

Technical data

ETIM 5.0 Class-ID: EC000019
 ETIM 5.0 Class-Description: Coaxial cable

Dielectric constant
 - Polyethylene (PE) 2.3-
 Polyethylene, hollow (PE-ho) 1.5-
 Polytetrafluoroethylene (PTFE) 2.1

Minimum bending radius
 Fixed installation: 6 x outer diameter

Specifications and approvals
 Similar to MIL-DTL 17 H

Temperature range
 Fixed installation: PE outer sheath: -40°C to +80°C
 Fixed installation: PVC outer sheath: -40°C to +80°C
 Fixed installation: fluoroplastic -55°C to +250°C

Article number	Article designation	Characteristic impedance in ohm	Capacity pF/m	Attenuation approx. dB/100 m at 200 MHz/400 MHz	Propagation rate (%)	Operating voltage 50 Hz eff. kV	Test voltage (kV)	Inner conductor material	Internal Ø	Di-electric material	Di-electric Ø	Outer conductor material	Outer cable sheath	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
Characteristic impedance: 50 ohm																
2170000	RG-58 C/U	50 +/- 2 Ω	101	24 / 33	66	2	5	CuLivz	0.9	PE	2.95	Cvz	PVC	4.95	19.1	38
2170001	RG-174 A/U	50 +/- 2 Ω	101	40 / 59	66	1.5	2	StCuLibl	0.48	PE	1.52	Cvz	PVC	2.80	5.4	12
2170002	RG-178 B/U	50 +/- 2 Ω	95	63 / 93	70	0.7	2	StCuLivs	0.3	PTFE	0.86	Cvs	FEP	1.91	4.4	9
2170003	RG-188 A/U	50 +/- 2 Ω	95	47 / 56	70	1.5	2	StCuLivs	0.51	PTFE	1.52	Cvs	PTFE	2.76	8.3	17.5
2170005	RG-213 /U	50 +/- 2 Ω	101	10 / 15	66	5	10	CuLibl	2.25	PE	7.25	Cbl	PVC	10.30	75.8	157
2170006	RG-214 /U	50 +/- 2 Ω	101	9 / 14	66	5	10	CuLivs	2.25	PE	7.25	CvsCvs	PVC	10.80	117.8	207
2170007	RG-223 /U	50 +/- 2 Ω	101	23 / 34	66	2	3	CuMvs	0.89	PE	2.95	CvsCvs	PVC	5.50	38.5	60
Characteristic impedance: 75 ohm																
2170016	RG-6 A/U	75 +/- 3 Ω	67	14 / 20	66	2	5	StCuMbl	0.72	PE	4.7	Cbl	PVC	8.40	72	120
2170009	RG-11 A/U	75 +/- 3 Ω	67	11 / 16	66	5	10	CuLivz	1.2	PE	7.3	Cbl	PVC	10.30	55.5	140
2170011	RG-11 A/U outdoor	75 +/- 3 Ω	67	11 / 16	66	5	10	CuLivz	1.2	PE	7.3	Cbl	PVC	12.10	55.5	170
2170012	RG-59 B/U	75 +/- 3 Ω	67	16.5/23	66	1.7	7	StCuMbl	0.6	PE	3.7	Cbl	PVC	6.15	25	57
2170010	RG-187 A/U	75 +/- 3 Ω	65	47 / 56	70	1.5	2	StCuLivs	0.31	PTFE	1.52	Cvs	PTFE	2.80	7.3	17
Characteristic impedance: 100 Ohm																
2170008	RG-62 A/U	93 +/- 5 Ω	43	15 / 19	75	0.8	2	StCuMbl	0.65	PE hollow	3.7	Cbl	PVC	6.15	26	52

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
 Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.
 Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths
 Photographs are not to scale and do not represent detailed images of the respective products.